



LNB

KU-BAND PLL

1000H



TYPICAL SPECIFICATIONS

Noise figure	0.7 to 0.9 dB depending on model number
L.O. stability (over temperature excl. offset)	±10 kHz to ±25 kHz (See HS1000 for < 5 kHz L.O. stability)
Phase noise (SSB)	-75 dBc/Hz at 1kHz -85 dBc/Hz at 10kHz -95 dBc/Hz at 100kHz
Input VSWR	2.0 : 1
Output VSWR	2.0 : 1



Conversion gain	62 dB
Output P1dB	5 dBm
Power requirements	+15 to +24 V supplied through center conductor of IF cable
Current drain	170 mA
Input Waveguide	WR75
Dimensions	110 (L) x 42 (W) x 42 (H) mm (4.3 x 1.7 x 1.7 in)
Weight	300g / 10.6 oz
Temperature Range	-40°C to +60°C

FREQUENCY BANDS AVAILABLE

Typical service	1000HA	1000HB	1000HC
Input frequency (GHz)	11.70 to 12.20	12.25 to 12.75	10.95 to 11.70
L.O. frequency (GHz)	10.75	11.30	10.00
Output frequency (MHz)	950 to 1450	950 to 1450	950 to 1700

HOW TO ORDER KU-BAND 1000H

1509HAF

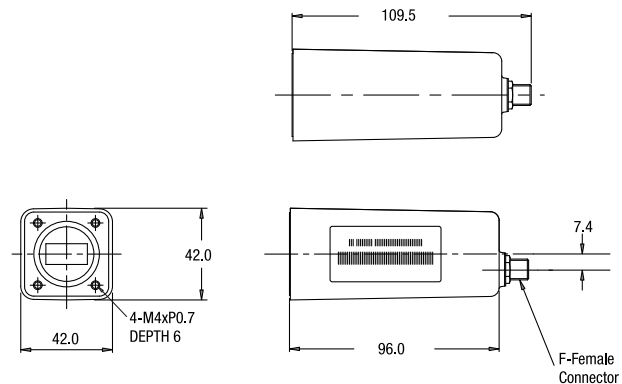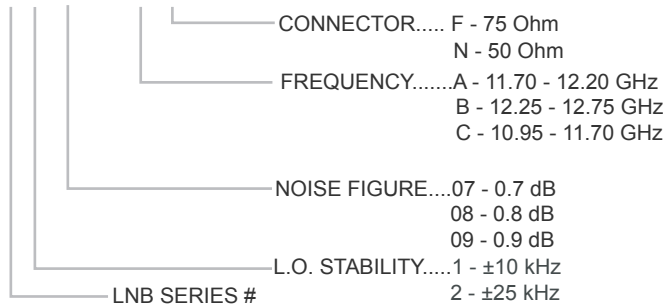

MECHANICAL DIAGRAM