

AZ110

Broadcast Satellite Modulator

Azimuth Product Family

AZIMUTH

SERIES

Description

The AZ110 is a state-of-the-art satellite modulator designed for broadcast contribution, DSNG and distribution applications over satellite in full compliance with the DVB standards. Depending on the applications and the activated features, the AZ110 can be used in conjunction with set-top boxes, professional IRDs or satellite demodulators such as the AZ910.

In its default configuration, the AZ110 is capable of transmitting one MPEG transport stream in DVB-S, DVB-DSNG or DVB-S2 mode. The AZ110 allows automatic or manual selection between two ASI inputs and has dual ASI monitoring outputs. Optionally, an optical ASI interface can be added.

To simplify the migration towards IP, the AZ110 is also available with DualFlow™ (combined ASI+Ethernet interface), providing broadcasters the following capabilities:

- The ability to transmit two transport streams simultaneously in DVB-S2 Multistream mode (via a second ASI input).
- The ability to interface (via a GbE input) with equipment or networks that carry transport streams over IP with the RTP or UDP protocols. The IP layer is removed by the modulator before transmission.
- The ability to transmit IP services (file transfers, VoIP, TCP services...) and transport stream(s) simultaneously. In this case the modulator performs the encapsulation of the IP data in XPE mode
- The ability to transmit IP services or transport stream(s) alternatively. In this case the modulator performs the encapsulation of the IP data in XPE or MPE mode.
- The ability to configure Quality of Service (QoS) of the IP traffic, while keeping absolute priority to the ASI streams

When several transport streams and/or IP services are transmitted simultaneously, the Variable Coding and Modulation (VCM) option allows each stream to be modulated with its own parameters.

To protect the satellite transmission, the BISS/BISSM or AES option can be activated. BISS scrambles a single program transport stream, BISSM a multiple program transport stream available on the ASI interface. AES allows to encrypt with a high security level the content of all DVB-S2 streams. When activated, the per stream mode allows to encrypt up to four S2 streams with individual keys.

At the output of the modulator, the signal is available on an L-band interface. Extended L-band, IF- and RF-band as well as BUC power supply and reference frequency are available as configuration options, providing a compact and cost effective solution.

This modulator provides exceptional performance and bandwidth efficiency. When activated, the unique linear and non-linear predistortion option Equalink™ provides an additional link margin improvement of up to 2,5dB, truly unleashing the full efficiency of higher modulation schemes such as 16 and 32 APSK.

Clean Channel Technology™ is available on the modulator as an option. Clean Channel Technology™ further improves satellite efficiency by up to 15% compared to the current DVB-S2 standard. Newtec's customers will be able to immediately benefit from Clean Channel Technology, as it is available as a software field upgrade for existing Newtec equipment.

Key features

- DVB-S2 and DVB-DSNG/S compliant
- QPSK, 8PSK, 16APSK and 32APSK
- Data rates up to 216 Mbit/s
- ASI or optical ASI transport stream interfaces
- L-band monitoring output
- Programmable amplitude slope equalizer
- Optional extended L-band (950 - 2150 MHz)
- Optional DualFlow™: combined ASI+GbE interface with integrated IP encapsulator and Configurable Quality of Service (QoS)
- Optional Baseband frame input support
- Optional switchable BUC power supply on L-band output
- Optional Multistream and/or VCM operation
- Optional integrated RF upconverter
- Optional 10 MHz reference input/output
- Optional BISS/BISSM scrambling or AES encryption
- Optional Linear and non-linear predistortion (Equalink™)
- Featured-based pricing and software upgradability
- Optional Clean Channel Technology™

Main advantages

- Lower operational costs thanks to highest bandwidth efficiency
- Guaranteed interoperability with DVB receivers
- High versatility and flexibility
- Future-proof design combining video and IP technologies
- High compactness

Applications

- Contribution
- Primary distribution
- Direct-to-home
- DSNG combined with IP services
- Data broadcast
- Distance learning, Business TV
- MVDDS
- Production testing

Related products

AZ410 Broadcast Satellite Modem
AZ910 DSNG and Contribution Demodulator

AZ7x0 Frequency converters
AZ21x 1+1 Modulator Redundancy Switch
AZ20x Universal Switching System

Related Documents

White paper Equalink®
Care Pack Brochure




SHAPING THE FUTURE OF SATELLITE COMMUNICATIONS

www.newtec.eu

Rev. 8/03.2012

Specifications – AZ110(R9)

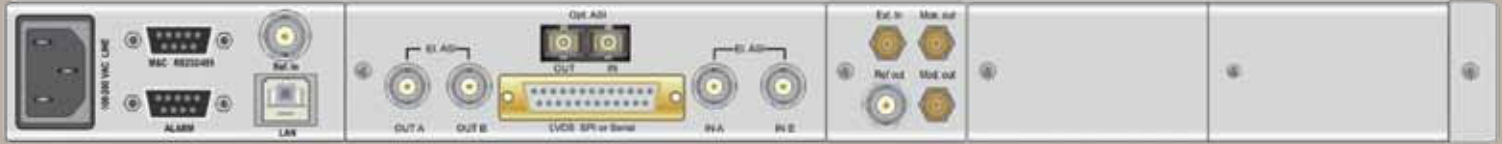

Input interface

ASI/SPI interface (default):

- 2 selectable ASI input on BNC (F) - 75 ohms (coax)
- 2 selectable ASI output (loop through) on BNC (F) - 75ohms (coax)
- SPI on 25 pin sub-D connector
- Optical ASI on ST (optional)
- 188 or 204 byte mode
- Encryption (optional)
 - BISS (single program): mode 0,1, E: up to 54 Mbit/s
 - BISSM (multiple program): mode 0,1,E: up to 100 Mbit/s
 - AES 64 bit encryption (optional)
- Rate adapter

DualFlow: Combined ASI+Ethernet (optional)

- 2 x ASI on BNC (F) - 75 ohms (coax)
- 2x ASI output (loop through) on BNC (F) - 75 ohms (coax)
- 188 byte mode
- Auto switching 10/100/1000 Base-T Ethernet interface:
 - transport stream on IP interface (UDP/RTP)
 - Ethernet/IP QoS:
 - 4 Queue priorities
 - 8 traffic classification rules
 - Configurable queue size
 - Layer 2 bridge mode – Ethernet frames over satellite (data piping)
 - Layer 3 bridge or router mode: IP packets over satellite using Multi Protocol (MPE) or Extended Performance (XPE) Encapsulation
 - Maximum 16 routes/destinations addresses
 - Processing of up to 40 000 IP packets per second – maximum 50 Mbit/s
- DVB-S2 Multistream support
- VCM support (optional)
- Base-Band frame (BBF) input support (optional)
- AES 64 bit encryption (optional)

Modulation

Supported modulation schemes and FEC

- DVB-S/DSNG:
 - Outer/Inner FEC: Reed Solomon / Viterbi
 - MDCODS:
 - QPSK: 1/2, 2/3, 3/4, 5/6, 7/8
 - 8PSK: 2/3, 5/6, 8/9
 - 16QAM: 3/4, 7/8
- DVB-S2:
 - Outer/Inner FEC: BCH/ LDPC
 - MDCODS:
 - QPSK: 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
 - 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10
 - 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
 - 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10

Baud rate range

- DVB-S2 0,05 – 45 Mbaud
- DVB-S/DSNG 0,05 – 45 Mbaud

Frame length

- DVB-S/DSNG 188 bytes
- DVB-S2 Short Frames 16200 bits
- DVB-S2 Normal Frames 64800 bits

Roll-off factor

- 20% - 25% -35%

Clean Channel Technology™

- Roll-Off: 5%-10%-15%-20%-25%-35%
- Optimum carrier spacing
- Advanced filter technology

Output interfaces

L-band output (default):

- Connector SMA (F), 50 ohms N(F), 50 ohms (with option: AA-12 and AA-13)
- Return loss > 14 dB
- Level -35/+5 dBm (+/- 2 dB)
- Frequency 950 - 1750 MHz (50 Hz steps) better than -65 dBc/4 kHz @ +5dBm level and > 256 kbaud
- spurious:

Extended L-band output (optional)

- Connector SMA (F), 50 ohms
- Return loss > 14 dB
- Level -35/+5 dBm (+/- 2dB)
- Frequency 950 - 2150 MHz (50 Hz steps) better than -65 dBc/4 kHz @ +5 dBm level and > 256 kbaud
- spurious:

IF-band (optional):

- Connector BNC (F) - 75 ohms
- Return loss 50 ohms: > 14 dB 75 ohms: > 20 dB (intermateable with 50 ohms)
- Level -30/+5 dBm (± 3 dB)
- Frequency 50 - 180 MHz (50 Hz steps) better than -65 dBc/4 kHz @ -10 dBm level and > 256 kbaud
- spurious:

L-band+IF (optional)

- L-band: -30/+0 dBm (+/- 3dB) output level fixed 70 or 140 MHz frequency
- IF: -34/+1 dBm (+/- 3 dB) output level better than -65 dBc/4 kHz @ -10 dBm level and > 256 kbaud
- spurious:

RF band (optional)

- Connector SMA (F), 50 ohms
- Return loss > 12 dB
- Frequencies 12,75-13,25 GHz 13,75-14,5 GHz
- Level -35/-7 dBm (+/- 3dB)
- Frequencies 5,85 - 7,05 GHz 17,30-18,10 GHz 17,60-18,40 GHz
- Level -25/+3 dBm (+/- 3dB)

L-band monitoring output (default)

- Connector SMA (F), 50 ohms
- Return loss > 7 dB
- Level -45 dBm
- Frequency default: identical to L-band output. with options AA-02 / AA-06: 1080 MHz

BUC power and reference frequency (optional)

- max. current 3 A
- voltage 24V, 48V
- frequency 10MHz
- stability ±5x10-8 over 0°C to 65°C

10 MHz reference input / output interface (optional)

- Connector BNC (F) - 50 ohms
- Input level -3dbm up to 7dBm
- Output level +7dBm

Internal Reference frequency

- High Stability (optional)
 - Stability ±5x10⁻⁸ over 0°C to 70°C
 - Ageing: ± 15 ppb/day ± 300 ppb/year
- Very High Stability (optional)
 - Stability ±2x10⁻⁹ over 0°C to 65°C
 - Ageing: ± 0.5 ppb/day ± 500 ppb/10 year

Generic

Monitor and control interfaces

- Web based GUI
- Diagnostics report, alarm log
- RMCP over TCP-IP/UDP and RS232/RS485
- SNMP v2c

Alarm interface

- Electrical dual contact closure alarm contacts
- Connector 9-pin sub-D (F)
- Logical interface and general device alarm

Physical

- 1RU, width: 19", depth 51 cm, 6 kg
- Power supply: 90-130 & 180-260 Vac, 105 VA, 47-63 Hz
- Temperature
 - Operational: 0°C to 40°C
 - Storage: -40 to +70°C
- Humidity: 5% to 85% non-condensing
- CE label

Ordering information

| AZ 110 Broadcast Satellite Modulator | | Order n° |
|---|--|----------------------------|
| Default Configuration | | |
| DVB Modulator, SNMP "Modulation & Baud rate: DVB-S 5Mbaud Input interface: ASI interface + Rate adaptor Output interface: L-band (950-1750 MHz)" | | AZ110 |
| Configuration options | | |
| Category | | Max. 1 option per category |
| Input Interface | ASI | Default |
| | ASI+ Optical ASI | AG-02 |
| | DualFlow: Ethernet + ASI (CCM) | AG-03 |
| | DualFlow: Ethernet + ASI (CCM+VCM)* | AG-04 |
| Output Interface | L-band (950-1750 MHz) | Default |
| | IF (50-180 MHz) | AA-02 |
| | L-band + 10MHz for BUC | AA-03 |
| | L-band + 10MHz + 24Vdc for BUC | AA-12 |
| | L-band + 10MHz + 48Vdc for BUC | AA-13 |
| | Extended L-band (950-2150 MHz) | AA-18 |
| | IF+ L-band | AA-06 |
| | L + C-band (5,85-7,05 GHz) | AA-14 |
| | L+ Ku-band (12,75-13,25 GHz) | AA-08 |
| | L+ Ku-band (13,75-14,50 GHz) | AA-09 |
| | L + DBS-band (17,30-18,10 GHz) | AA-10 |
| L + DBS-band (17,60-18,40 GHz) | AA-11 | |
| Modulation & Baud rate | DVB-S Q/8PSK, 16QAM 5Mbaud | Default |
| | DVB-S Q/8PSK, 16QAM 15Mbaud* | AB-02 |
| | DVB-S Q/8PSK, 16QAM 30Mbaud* | AB-03 |
| | DVB-S Q/8PSK, 16QAM 45Mbaud* | AB-04 |
| | DVB-S/S2 QPSK 5Mbaud* | AB-25 |
| | DVB-S/S2 QPSK 15Mbaud* | AB-26 |
| | DVB-S/S2 QPSK 30Mbaud* | AB-27 |
| | DVB-S/S2 QPSK 45Mbaud* | AB-28 |
| | DVB-S/S2 Q/8PSK 5Mbaud* | AB-05 |
| | DVB-S/S2 Q/8PSK 15Mbaud* | AB-06 |
| | DVB-S/S2 Q/8PSK 30Mbaud* | AB-07 |
| | DVB-S/S2 Q/8PSK 45Mbaud* | AB-08 |
| | DVB-S/S2 Q/8PSK, 16QAM, 16APSK 5Mbaud* | AB-09 |
| | DVB-S/S2 Q/8PSK, 16QAM, 16APSK 15Mbaud* | AB-10 |
| | DVB-S/S2 Q/8PSK, 16QAM, 16APSK 30Mbaud* | AB-11 |
| | DVB-S/S2 Q/8PSK, 16QAM, 16APSK 45Mbaud* | AB-12 |
| DVB-S/S2 Q/8PSK, 16QAM, 16/32APSK 5Mbaud* | AB-13 | |
| DVB-S/S2 Q/8PSK, 16QAM, 16/32APSK 15Mbaud* | AB-14 | |
| DVB-S/S2 Q/8PSK, 16QAM, 16/32APSK 30Mbaud* | AB-15 | |
| DVB-S/S2 Q/8PSK, 16QAM, 16/32APSK 45Mbaud* | AB-16 | |
| Additional options | | |
| Category | | Max. 1 option per category |
| 10MHz reference In/Out | High stability | GR-01 |
| | Very high stability | GR-02 |
| Clean Channel Technology™ | Clean Channel Technology for 5 Mbaud* AI-01 | AI-01 |
| | Clean Channel Technology for 15 Mbaud* AI-02 | AI-02 |
| | Clean Channel Technology for 30 Mbaud* AI-03 | AI-03 |
| | Clean Channel Technology for 45 Mbaud* AI-04 | AI-04 |
| Predistortion | Equalink * | AC-01 |
| Encryption | BISS (**) | AD-01 |
| | BISSM (**) | AD-02 |
| Security | AES 64 bit encryption * | AS-01 |
| Input frame | Base-Band frame (only with Ethernet interface) | AV-01 |
| Services | | |
| Category | | |
| Assistance | Care Pack Basic | GA-06 |
| | Care Pack Extended | GA-07 |

(*) upgradeable via license key

Other configurations and options such as RF-band amplifiers or 68 Mbaud rate are available on request. Contact your sales representative for details (sales@newtec.eu).

(**) not available with DualFlow option

Europe

Tel: +32 3 780 65 00

Fax: +32 3 780 65 49

North-America

Tel: +1 203 323-0042

Fax: +1 203 323-8406

South-America

Tel: +55 11 2092 6220

Fax: +55 11 2093 3756

Asia-Pacific

Tel: +65 6777 22 08

Fax: +65 6777 08 87

China

Tel: +86 10-823 18 730

Fax: +86 10-823 18 731

MENA

Tel: +971 4 390 18 78

Fax: +971 4 368 67 68